

Message Implementation Guideline

Brose DELFOR D.97A

based on

DELFOR

Delivery schedule message

UN D.97A S3

Issue date: 25.10.2017

Author: Brose

Message structure.....	2
Branching diagram	4
Segments	10

Structure / Table of Contents

No	Tag	St	MaxOcc	Level	Content
1	UNB	M	1	0	INTERCHANGE HEADER
2	UNH	M	1	0	MESSAGE HEADER
3	BGM	M	1	0	BEGINNING OF MESSAGE
4	DTM	M	10	1	DATE/TIME/PERIOD
5	FTX	C	5	1	FREE TEXT
	SG2	C	1	1	NAD
6	NAD	M	1	1	NAME AND ADDRESS
	SG2	C	99	1	NAD
7	NAD	M	1	1	NAME AND ADDRESS
	SG6	C	9999	1	GIS-SG7-SG12
8	GIS	M	1	1	GENERAL INDICATOR
	SG7	C	1	2	NAD-SG10
9	NAD	M	1	2	NAME AND ADDRESS
	SG10	C	5	3	CTA
10	CTA	M	1	3	CONTACT INFORMATION
	SG12	C	9999	2	LIN-PIA-LOC-LOC-FTX-SG13-SG13-SG13-SG15-SG15-SG15-SG
11	LIN	M	1	2	LINE ITEM
12	PIA	C	10	3	ADDITIONAL PRODUCT ID
13	LOC	C	999	3	PLACE/LOCATION IDENTIFICATION
14	LOC	C	999	3	PLACE/LOCATION IDENTIFICATION
15	FTX	C	5	3	FREE TEXT
	SG13	C	10	3	Order Information
16	RFF	M	1	3	REFERENCE
17	DTM	C	1	4	DATE/TIME/PERIOD
	SG13	C	10	3	Previous delivery instruction
18	RFF	M	1	3	REFERENCE
19	DTM	C	1	4	DATE/TIME/PERIOD
	SG13	C	10	3	Actual delivery schedule
20	RFF	M	1	3	REFERENCE
21	DTM	C	1	4	DATE/TIME/PERIOD
	SG15	C	10	3	QTY-DTM
22	QTY	M	1	3	QUANTITY
23	DTM	C	2	4	DATE/TIME/PERIOD
	SG15	C	10	3	QTY-DTM
24	QTY	M	1	3	QUANTITY
25	DTM	C	2	4	DATE/TIME/PERIOD
	SG15	C	10	3	QTY
26	QTY	M	1	3	QUANTITY
	SG15	C	10	3	QTY-DTM-SG16
27	QTY	M	1	3	QUANTITY
28	DTM	C	2	4	DATE/TIME/PERIOD
	SG16	C	10	4	RFF-DTM
29	RFF	M	1	4	REFERENCE

No = Consecutive segment number, MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Structure / Table of Contents


No	Tag	St	MaxOcc	Level	Content
30	DTM	C	1	5	DATE/TIME/PERIOD
	SG17	C	999	3	To be shipped
31	SCC	M	1	3	SCHEDULING CONDITIONS
	SG18	C	999	4	to be shipped
32	QTY	M	1	4	QUANTITY
33	DTM	C	2	5	DATE/TIME/PERIOD
	SG17	C	999	3	Fabrication authorisation
34	SCC	M	1	3	SCHEDULING CONDITIONS
	SG18	C	999	4	Fabrication information
35	QTY	M	1	4	QUANTITY
36	DTM	C	2	5	DATE/TIME/PERIOD
	SG17	C	999	3	Material authorisation information
37	SCC	M	1	3	SCHEDULING CONDITIONS
	SG18	C	999	4	Material authorisation
38	QTY	M	1	4	QUANTITY
39	DTM	C	2	5	DATE/TIME/PERIOD
40	UNT	M	1	0	MESSAGE TRAILER
41	UNZ	M	1	0	INTERCHANGE TRAILER

No = Consecutive segment number, MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used


Branching Diagram of Used Segments/Groups

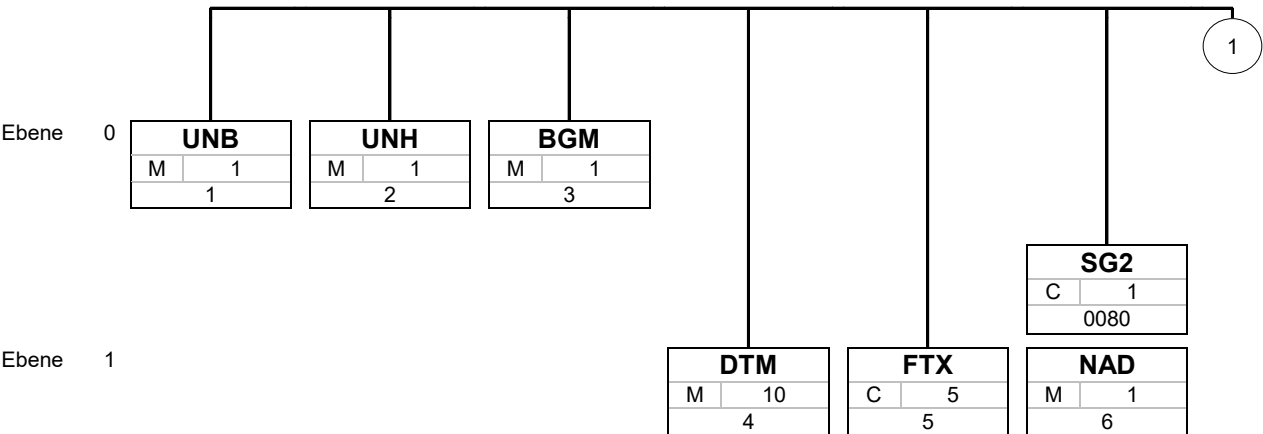

Bez
St MaxWdh
Nr

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number

Branching Diagram of Used Segments/Groups

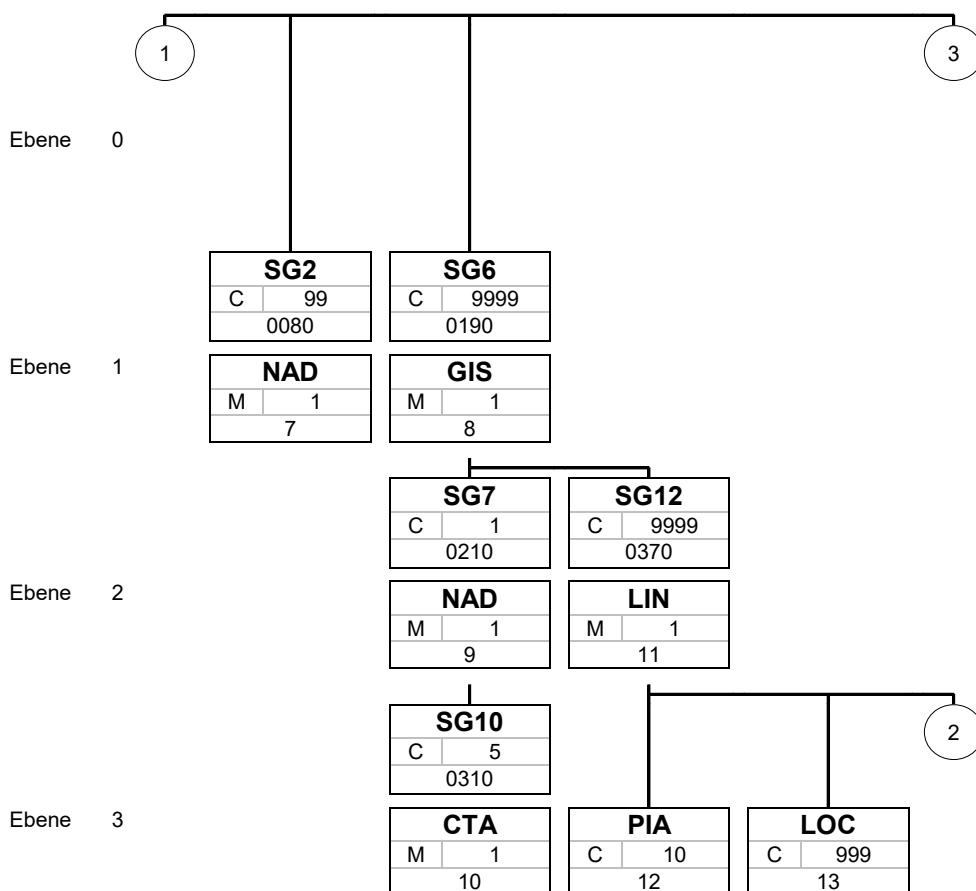

Bez	
St	MaxWdh
Nr	


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group

No = Consecutive segment number


Branching Diagram of Used Segments/Groups

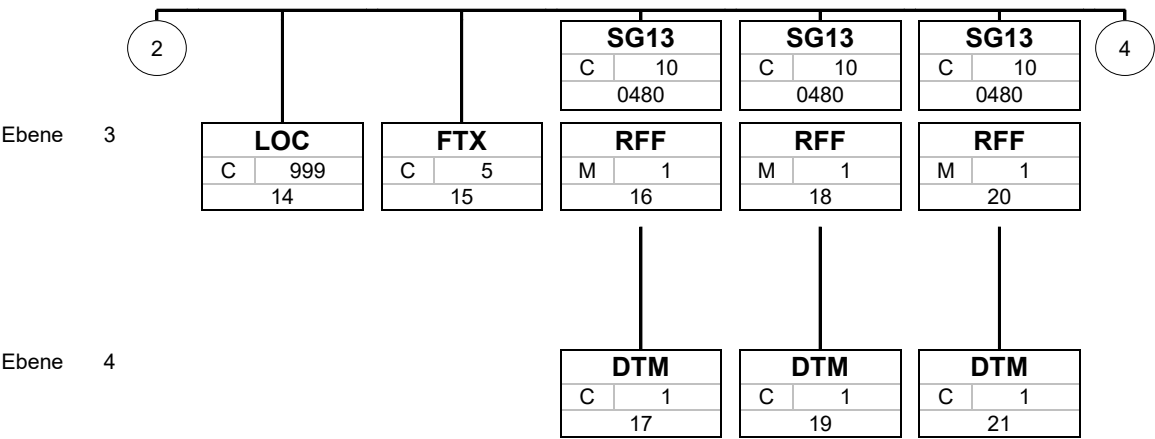

Bez
St MaxWdh
Nr

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number

Branching Diagram of Used Segments/Groups

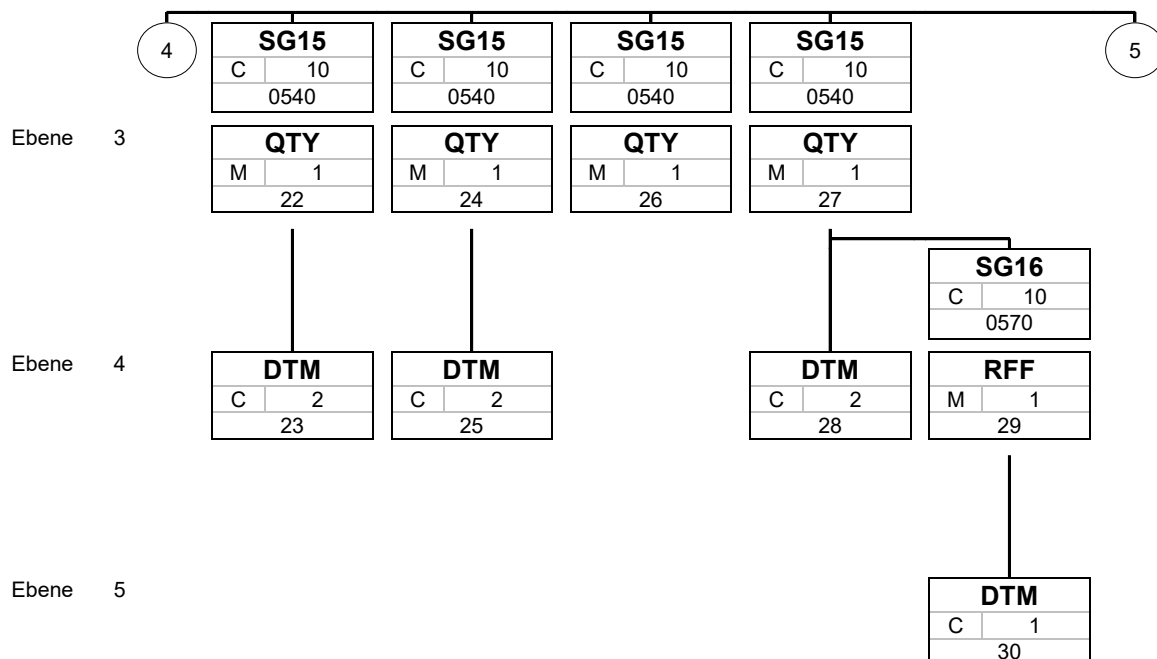

Bez
St MaxWdh
Nr


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group

No = Consecutive segment number

Branching Diagram of Used Segments/Groups

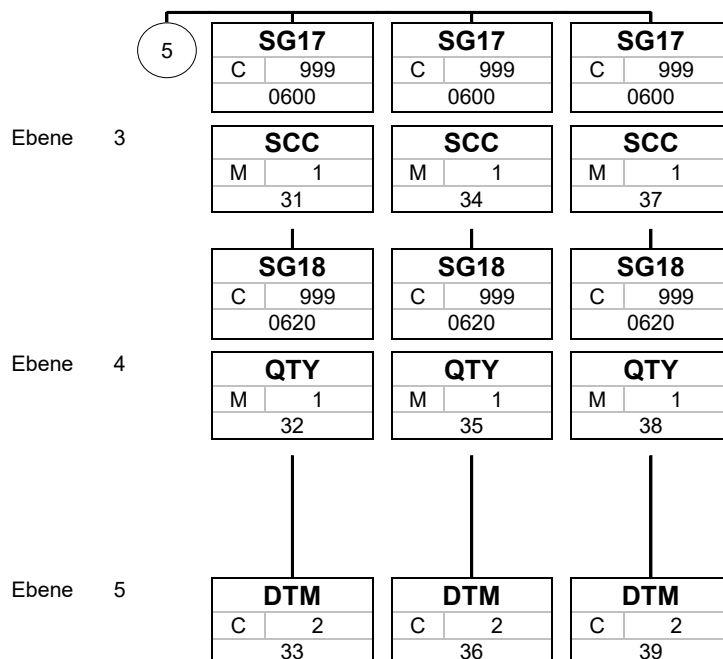

Bez
St MaxWdh
Nr


Tag = Segment/Group Tag

St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)

MaxOcc = Maximum occurrence of the segment/group

No = Consecutive segment number

Branching Diagram of Used Segments/Groups

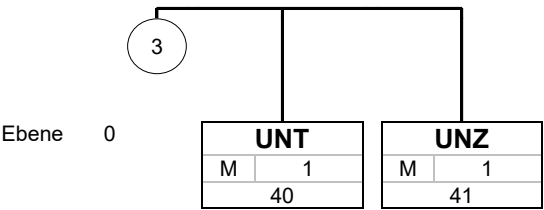

Bez
St MaxWdh
Nr

Tag = Segment/Group Tag
St = Status (M=Mandatory, C=Conditional, R=Required, O=Optional, A=Advised, D=Dependent)
MaxOcc = Maximum occurrence of the segment/group
No = Consecutive segment number

Segments

No	Tag	St	MaxOcc	Level	Name
----	-----	----	--------	-------	------

1	UNB	M	1	0	INTERCHANGE HEADER
---	------------	---	---	---	--------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNB				
S001	SYNTAX IDENTIFIER	M	M	
0001	Syntax identifier	M a4	M a4	UNOA UN/ECE level A Indication of the syntax version used for this message. 2 Version 2
0002	Syntax version number	M n1	M n1	
S002	INTERCHANGE SENDER	M	M	
0004	Sender identification	M an..35	M an..35	Communication code/mailbox number of the party originating the message
0007	Partner identification code qualifier	C an..4	C an..4	BROSE Qualifier
0008	Address for reverse routing	C an..14	N	Not used
S003	INTERCHANGE RECIPIENT	M	M	
0010	Recipient identification	M an..35	M an..35	Communication code/mailbox number of the party receiving the message
0007	Partner identification code qualifier	C an..4	C an..4	if required by supplier
0014	Routing address	C an..14	N	Not used
S004	DATE/TIME OF PREPARATION	M	M	
0017	Date of preparation	M n6	M n6	YYMMDD format
0019	Time of preparation	M n4	M n4	HHMM format
0020	Interchange control reference	M an..14	M an..14	The Brose interchange control reference number is unique within an inventory year. IDoc: R
S005	RECIPIENT'S REFERENCE PASSWORD	C	N	
0022	Recipient's reference/password	M an..14	N	Not used
0025	Recipient's reference/password qualifier	C an2	N	Not used
0026	Application reference	C an..14	N	Not used
0029	Processing priority code	C a1	N	Not used
0031	Acknowledgement request	C n1	N	Not used
0032	Communications agreement ID	C an..35	N	Not used
0035	Test indicator	C n1	N	Not used

Remark:

Example:

UNB+UNOA:2+00013000428BRO:1+LIEFERANT:OD+040428:0829+00207'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
----	-----	----	--------	-------	------

2	UNH	M	1	0	MESSAGE HEADER
---	------------	---	---	---	----------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNH				
0062	Message reference number	M an..14	M an..14	Message Control number assigned by the sender to the message.
S009	MESSAGE IDENTIFIER	M	M	
0065	Message type identifier	M an..6	M an..6	DELFOR Delivery schedule message
0052	Message type version number	M an..3	M an..3	D Draft version/UN/EDIFACT Directory
0054	Message type release number	M an..3	M an..3	97A Release 1997 - A
0051	Controlling agency	M an..2	M an..2	UN UN/ECE/TRADE/WP.4
0057	Association assigned code	C an..6	N	Not used
0068	Common access reference	C an..35	N	Not used
S010	STATUS OF THE TRANSFER	C	N	
0070	Sequence message transfer number	M n..2	N	Not used
0073	First/last sequence message transfer indication	C a1	N	Not used

Remark:
Example:

UNH+1+DELFOR:D:97A:UN'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
----	-----	----	--------	-------	------

3	BGM	M	1	0	BEGINNING OF MESSAGE
---	------------	---	---	---	----------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
BGM				
C002	DOCUMENT/MESSAGE NAME	C	C	
1001	Document/message name, coded	C an..3	C an..3	241 Delivery schedule
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
1000	Document/message name	C an..35	N	Not used
C106	DOCUMENT/MESSAGE IDENTIFICATION	C	C	
1004	Document/message number	C an..35	C an..35	Brose: Continuous counter within the message Document Number
1056	Version	C an..9	N	Not used
1060	Revision number	C an..6	N	Not used
1225	Message function, coded	C an..3	N	Not used
4343	Response type, coded	C an..3	N	Not used

Remark:

Example:

BGM+241+1'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
----	-----	----	--------	-------	------

4	DTM	M	10	1	DATE/TIME/PERIOD
---	------------	---	----	---	------------------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	137 Document/message date/time
2380	Date/time/period	C an..35	C an..35	Actual issue date/time of the document.
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+137:20040428:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
----	-----	----	--------	-------	------

5	FTX	C	5	1	FREE TEXT
---	------------	---	---	---	-----------

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject qualifier	M an..3	M an..3	AAI General information
4453	Text function, coded	C an..3	N	Not used
C107	TEXT REFERENCE	C	N	
4441	Free text identification	M an..17	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C108	TEXT LITERAL	C	C	
4440	Free text	M an..70	M an..70	Textual information. IDoc: E1EDK11_TXT01
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT02
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT03
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT04
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT05
3453	Language, coded	C an..3	C an..3	Language, coded

Remark:
Example:

FTX+AAI+++Free text:Free text:Free text:Free text:Free text+de'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG2	C	1	1	NAD
6	NAD	M	1	1	NAME AND ADDRESS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	BY Buyer
C082	PARTY IDENTIFICATION DETAILS	C	C	
3039	Party id. identification	M an..35	M an..35	Brose: Per Brose-plant / Supplier-code a customer-number can be transmitted. If needed to be notified from the supplier to Brose Brose plant code / Brose party-id assigned by supplier 1012 Coburg 1017 Hallstadt 1020 Meerane 1023 Sta. Margarida 1024 Coventry 1029 Roznov 1031 Curitiba 1033 Puebla 1036 Bratislava 1037 Gent 1038 Saarwellingen 1042 Chicago 1044 Wuppertal 1047 Tuscaloosa 1050 Rastatt
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	C an..3	91 Assigned by seller or seller's agent 92 Assigned by buyer or buyer's agent
C058	NAME AND ADDRESS	C	N	
3124	Name and address line	M an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
C080	PARTY NAME	C	C	
3036	Party name	M an..35	M an..35	Brose: not filled when using SAP as ERP-system Partner Name
3036	Party name	C an..35	C an..35	Brose: not filled when using SAP as ERP-system Partner Name
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3045	Party name format, coded	C an..3	N	Not used
C059	STREET	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	Brose: not filled when using SAP as ERP-system Street and number/p.o. box
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3164	City name	C an..35	C an..35	Brose: not filled when using SAP as ERP-system CITY NAME
3229	Country sub-entity identification	C an..9	N	Not used
3251	Postcode identification	C an..9	N	Not used

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
3207	Country, coded	C an..3	C an..3	Brose: not filled when using SAP as ERP-system COUNTRY, CODED

Remark:**Example:**

NAD+BY+1012::92++Partner Name:Partner Name+Street and number/p.o. box+CITY NAME+++DE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG2	C	99	1	NAD
7	NAD	M	1	1	NAME AND ADDRESS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	SU Supplier
C082	PARTY IDENTIFICATION DETAILS	C	C	
3039	Party id. identification	M an..35	M an..35	Supplier number assigned by Brose Brose: Vendor-code for the supplier (LF)
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	C an..3	91 Assigned by seller or seller's agent 92 Assigned by buyer or buyer's agent
C058	NAME AND ADDRESS	C	N	
3124	Name and address line	M an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
C080	PARTY NAME	C	C	
3036	Party name	M an..35	M an..35	
3036	Party name	C an..35	C an..35	
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3045	Party name format, coded	C an..3	N	Not used
C059	STREET	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3164	City name	C an..35	C an..35	Brose: not filled when using SAP as ERP-system CITY NAME
3229	Country sub-entity identification	C an..9	N	Not used
3251	Postcode identification	C an..9	N	Not used
3207	Country, coded	C an..3	C an..3	Brose: not filled when using SAP as ERP-system COUNTRY, CODED

Remark:

Example:

NAD+SU+0001000629::92++Partner Name:Partner Name+Street and number/p.o. box+CITY NAME+++DE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
8	GIS	M	1	1	GENERAL INDICATOR

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
GIS				
C529	PROCESSING INDICATOR	M	M	
7365	Processing indicator, coded	M an..3	M an..3	Processing of information to note that complete data details (not just changes) are transmitted. 37 Complete information Brose: The new schedule replaces complete the old schedule
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
7187	Process type identification	C an..17	N	Not used

Remark:

Example:

GIS+37'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG7	C	1	2	NAD-SG10
9	NAD	M	1	2	NAME AND ADDRESS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
NAD				
3035	Party qualifier	M an..3	M an..3	CN Consignee
C082	PARTY IDENTIFICATION DETAILS	C	C	
3039	Party id. identification	M an..35	M an..35	Brose: Brose-plant-code party-id
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	C an..3	92 Assigned by buyer or buyer's agent
C058	NAME AND ADDRESS	C	N	
3124	Name and address line	M an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
3124	Name and address line	C an..35	N	Not used
C080	PARTY NAME	C	C	
3036	Party name	M an..35	M an..35	Brose: not filled when using SAP as ERP-system Partner Name
3036	Party name	C an..35	C an..35	Brose: not filled when using SAP as ERP-system Partner Name
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3036	Party name	C an..35	N	Not used
3045	Party name format, coded	C an..3	N	Not used
C059	STREET	C	C	
3042	Street and number/p.o. box	M an..35	M an..35	Brose: not filled when using SAP as ERP-system Street and number/p.o. box
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3042	Street and number/p.o. box	C an..35	N	Not used
3164	City name	C an..35	C an..35	Brose: not filled when using SAP as ERP-system City name
3229	Country sub-entity identification	C an..9	N	Not used
3251	Postcode identification	C an..9	N	Not used
3207	Country, coded	C an..3	C an..3	Brose: not filled when using SAP as ERP-system Country, coded

Remark:

Example:

NAD+CN+1012::92++Partner Name:Partner Name+Street+++AD'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG7	C	1	2	NAD-SG10
	SG10	C	5	3	CTA
10	CTA	M	1	3	CONTACT INFORMATION

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
CTA				
3139	Contact function, coded	C an..3	C an..3	IC Information contact
C056	DEPARTMENT OR EMPLOYEE DETAILS	C	C	
3413	Department or employee identification	C an..17	C an..17	Brose: 3-digit code of the material-controlling of the material master of the plant Department or employee identification
3412	Department or employee	C an..35	C an..35	Brose: description of the 3-digit-code Contact Person/Department or employee

Remark:
Example:

CTA+IC+S14:NAME '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
11	LIN	M	1	2	LINE ITEM

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LIN				
1082	Line item number	C an..6	N	Not used
1229	Action request/notification, coded	C an..3	N	Not used
C212	ITEM NUMBER IDENTIFICATION	C	C	
7140	Item number	C an..35	C an..35	Brose: 10-digit Brose-part-number in shape XXXXXX-XXX Buyer's item number
7143	Item number type, coded	C an..3	C an..3	IN Buyer's item number
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C829	SUB-LINE INFORMATION	C	N	
5495	Sub-line indicator, coded	C an..3	N	Not used
1082	Line item number	C an..6	N	Not used
1222	Configuration level	C n..2	N	Not used
7083	Configuration, coded	C an..3	N	Not used

Remark:

Example:

LIN+++907235-100:IN'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
12	PIA	C	10	3	ADDITIONAL PRODUCT ID

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
PIA				
4347	Product id. function qualifier	M an..3	M an..3	1 Additional identification
C212	ITEM NUMBER IDENTIFICATION	M	M	
7140	Item number	C an..35	C an..35	Brose: At the request of the supplier the supplier's part-number can be maintained in the Brose ERP-system through the responsible material-controller of the plant and can be then transmitted in the message. additional identification number
7143	Item number type, coded	C an..3	C an..3	SA Supplier's article number
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	ITEM NUMBER IDENTIFICATION	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	ITEM NUMBER IDENTIFICATION	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	ITEM NUMBER IDENTIFICATION	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C212	ITEM NUMBER IDENTIFICATION	C	N	
7140	Item number	C an..35	N	Not used
7143	Item number type, coded	C an..3	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used

Remark:

Example:

PIA+1+123414231:SA'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
13	LOC	C	999	3	PLACE/LOCATION IDENTIFICATION

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Place/location qualifier	M an..3	M an..3	11 Place/port of discharge
C517	LOCATION IDENTIFICATION	C	C	
3225	Place/location identification	C an..25	C an..25	Brose: Docking gate of the scheduling agreement (RFF+ON). If value "01" will be transmitted, the docking gate is not yet finally defined and it must be ask for with the responsible material-controller of the plant. Each docking gate represents a separate delivery address. For informations about the complete delivery address please contact the responsible material-controller of the plant or the purchasing department. Place/Port of discharge
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
3224	Place/location	C an..70	N	Not used
C519	RELATED LOCATION ONE IDENTIFICATION	C	N	
3223	Related place/location one identification	C an..25	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
3222	Related place/location one	C an..70	N	Not used
C553	RELATED LOCATION TWO IDENTIFICATION	C	N	
3233	Related place/location two identification	C an..25	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
3232	Related place/location two	C an..70	N	Not used
5479	Relation, coded	C an..3	N	Not used

Remark:

Example:

LOC+11+C0210'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
14	LOC	C	999	3	PLACE/LOCATION IDENTIFICATION

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
LOC				
3227	Place/location qualifier	M an..3	M an..3	159 Additional internal destination
C517	LOCATION IDENTIFICATION	C	C	
3225	Place/location identification	C an..25	C an..25	Brose: only conditional information if available Additional internal destination
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
3224	Place/location	C an..70	N	Not used
C519	RELATED LOCATION ONE IDENTIFICATION	C	N	
3223	Related place/location one identification	C an..25	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
3222	Related place/location one	C an..70	N	Not used
C553	RELATED LOCATION TWO IDENTIFICATION	C	N	
3233	Related place/location two identification	C an..25	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
3232	Related place/location two	C an..70	N	Not used
5479	Relation, coded	C an..3	N	Not used

Remark:

Example:

LOC+159+126-01'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
15	FTX	C	5	3	FREE TEXT

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
FTX				
4451	Text subject qualifier	M an..3	M an..3	AAI General information
4453	Text function, coded	C an..3	N	Not used
C107	TEXT REFERENCE	C	N	
4441	Free text identification	M an..17	N	Not used
1131	Code list qualifier	C an..3	N	Not used
3055	Code list responsible agency, coded	C an..3	N	Not used
C108	TEXT LITERAL	C	C	
4440	Free text	M an..70	M an..70	Textual information. IDoc: E1EDK11_TXT01
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT02
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT03
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT04
4440	Free text	C an..70	C an..70	Textual information. IDoc: E1EDK11_TXT05
3453	Language, coded	C an..3	C an..3	Language, coded

Remark:

Example:

FTX+AAI+++Free text:Free text:Free text:Free text:Free text+de'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG13	C	10	3	Order Information
16	RFF	M	1	3	REFERENCE

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	REFERENCE	M	M	
1153	Reference qualifier	M an..3	M an..3	ON Order number (purchase)
1154	Reference number	C an..35	C an..35	Brose: Scheduling agreement number of the logistic Order number
1156	Line number	C an..6	N	Not used
4000	Reference version number	C an..35	N	Not used

Remark:
Example:

RFF+ON:5500007038 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG13	C	10	3	Order Information
17	DTM	C	1	4	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	171 Reference date/time
2380	Date/time/period	C an..35	C an..35	Brose: not used when using SAP as ERP-system Order date
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+171:20040428:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG13	C	10	3	Previous delivery instruction
18	RFF	M	1	3	REFERENCE

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	REFERENCE	M	M	
1153	Reference qualifier	M an..3	M an..3	AIF Previous delivery instruction number
1154	Reference number	C an..35	C an..35	Brose: Previous release number within the scheduling agreement Previous delivery instruction
1156	Line number	C an..6	N	Not used
4000	Reference version number	C an..35	N	Not used

Remark:

Example:

RFF+AIF:X'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG13	C	10	3	Previous delivery instruction
19	DTM	C	1	4	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	137 Document/message date/time
2380	Date/time/period	C an..35	C an..35	Brose: creation date of the previous release Actual issue date of the document
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+137:20040427:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG13	C	10	3	Actual delivery schedule
20	RFF	M	1	3	REFERENCE

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	REFERENCE	M	M	
1153	Reference qualifier	M an..3	M an..3	AAN Delivery schedule number
1154	Reference number	C an..35	C an..35	Brose: Actual release number within the scheduling agreement actual delivery instruction
1156	Line number	C an..6	N	Not used
4000	Reference version number	C an..35	N	Not used

Remark:

Example:

RFF+AAN:155'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG13	C	10	3	Actual delivery schedule
21	DTM	C	1	4	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	137 Document/message date/time
2380	Date/time/period	C an..35	C an..35	Brose: creation date of the previous release Actual issue date of the document
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+137:20040427:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM
22	QTY	M	1	3	QUANTITY

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	QUANTITY DETAILS	M	M	
6063	Quantity qualifier	M an..3	M an..3	70 Cumulative quantity received
6060	Quantity	M n..15	M n..15	Brose: Cumulative quantity of the goods receipt for all positiv or negativ bookings of deliveries from a defined start date (may differ to start of inventory year) until the actual release calculation. Cumulative quantity received
6411	Measure unit qualifier	C an..3	C an..3	Measure unit qualifier

Remark:

Example:

QTY+70:42559:PCE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM
23	DTM	C	2	4	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	51 Cumulative quantity start date
2380	Date/time/period	C an..35	C an..35	Brose: When segment is not existing the cumulative figure is calculated since the creation of the scheduling agreement
				Start date of cumulative quantity calculation
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+51:20040101:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM
24	QTY	M	1	3	QUANTITY

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	QUANTITY DETAILS	M	M	
6063	Quantity qualifier	M an..3	M an..3	78 Cumulative quantity scheduled
6060	Quantity	M n..15	M n..15	Brose: not used when using SAP as ERP-system Cumulative quantity scheduled since start of inventory year
6411	Measure unit qualifier	C an..3	C an..3	Measure unit qualifier

Remark:
Example:

QTY+78:22303:PCE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM
25	DTM	C	2	4	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	51 Cumulative quantity start date
2380	Date/time/period	C an..35	C an..35	Brose: not used when using SAP as ERP-system
				Start date of cumulative quantity calculation
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+51:20040101:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY
26	QTY	M	1	3	QUANTITY

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	QUANTITY DETAILS	M	M	
6063	Quantity qualifier	M an..3	M an..3	73 Outstanding quantity
6060	Quantity	M n..15	M n..15	Brose: not used when using SAP as ERP-system
				Quantity balance
6411	Measure unit qualifier	C an..3	C an..3	Measure unit qualifier

Remark:

Example:

QTY+73:0:PCE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM-SG16
27	QTY	M	1	3	QUANTITY

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	QUANTITY DETAILS	M	M	
6063	Quantity qualifier	M an..3	M an..3	48 Received quantity
6060	Quantity	M n..15	M n..15	Brose: received quantity booked to the delivery note (RFF+AAK)
				received quantity, IDoc: E1EDP10-LFIMG
6411	Measure unit qualifier	C an..3	C an..3	Measure unit qualifier

Remark:

Example:

QTY+48:672:PCE '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM-SG16
28	DTM	C	2	4	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	50 Goods receipt date/time
2380	Date/time/period	C an..35	C an..35	Brose: Date of the booking of the goods receipt goods received date
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+50:20040422:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM-SG16
	SG16	C	10	4	RFF-DTM
29	RFF	M	1	4	REFERENCE

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
RFF				
C506	REFERENCE	M	M	
1153	Reference qualifier	M an..3	M an..3	AAK Despatch advice number
1154	Reference number	C an..35	C an..35	Brose: document number to which the booking of the goods receipt refers to Last Despatch advice number
1156	Line number	C an..6	N	Not used
4000	Reference version number	C an..35	N	Not used

Remark:

Example:

RFF+AAK:86303820'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG15	C	10	3	QTY-DTM-SG16
	SG16	C	10	4	RFF-DTM
30	DTM	C	1	5	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	50 Goods receipt date/time
2380	Date/time/period	C an..35	C an..35	Brose: Date of the booking of the goods receipt goods received date
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+50:20030422:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	To be shipped
31	SCC	M	1	3	SCHEDULING CONDITIONS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
SCC				
4017	Delivery plan status indicator, coded	M an..3	M an..3	Brose: When using SAP as ERP-system only value "4" is used. 1 Firm 4 Planning/forecast
4493	Delivery requirements, coded	C an..3	N	Not used
C329	PATTERN DESCRIPTION	C	C	
2013	Frequency, coded	C an..3	C an..3	Brose basic principle of requirement dates: day 1 - 20 as daily requirement "Y" rest of week from day 21 as weekly requirement "W" following 8 weeks as weekly requirement "W" rest of this month from this last weekly requirement as month requirement "M" further months as monthly requirements "M" F Flexible interval (from date X through date Y) M Monthly (calendar months) W Weekly Y Daily
2015	Despatch pattern, coded	C an..3	N	Not used
2017	Despatch pattern timing, coded	C an..3	N	Not used

Remark:

Example:

SCC+4++Y'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	To be shipped
	SG18	C	999	4	to be shipped
32	QTY	M	1	4	QUANTITY

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	QUANTITY DETAILS	M	M	
6063	Quantity qualifier	M an..3	M an..3	83 Backorder quantity 84 Urgent delivery quantity 113 Quantity to be delivered
6060	Quantity	M n..15	M n..15	Quantity to be shipped
6411	Measure unit qualifier	C an..3	C an..3	For code value see UN/ECE Recommendation No. 20

Remark:
Example:

QTY+113:12345:PCE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	To be shipped
	SG18	C	999	4	to be shipped
33	DTM	C	2	5	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	2 Delivery date/time, requested
2380	Date/time/period	C an..35	C an..35	Brose: dates are arrival dates at the docking gate (LOC+11) when SAP is ERP-system of the plant Delivery date/time requested
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD 711 CCYYMMDD-CCYYMMDD

Remark:
Example:

DTM+2:20040625:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	Fabrication authorisation
34	SCC	M	1	3	SCHEDULING CONDITIONS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
SCC				
4017	Delivery plan status indicator, coded	M an..3	M an..3	2 Commitment for manufacturing and material
4493	Delivery requirements, coded	C an..3	N	Not used
C329	PATTERN DESCRIPTION	C	N	Not used
2013	Frequency, coded	C an..3	N	Not used
2015	Despatch pattern, coded	C an..3	N	Not used
2017	Despatch pattern timing, coded	C an..3	N	Not used

Remark:
Example:

SCC+2 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	Fabrication authorisation
	SG18	C	999	4	Fabrication information
35	QTY	M	1	4	QUANTITY

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	QUANTITY DETAILS	M	M	
6063	Quantity qualifier	M an..3	M an..3	3 Cumulative quantity
6060	Quantity	M n..15	M n..15	Brose: always quantity "0" when using SAP as ERP-system. The fabrication authorisation is then described in the DTM-segment Cumulative fabrication authorisation quantity for the period defined in the following DTMs
6411	Measure unit qualifier	C an..3	C an..3	For code value see UN/ECE Recommendation No. 20+F62

Remark:

Example:

QTY+3:12345:PCE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	Fabrication authorisation
	SG18	C	999	4	Fabrication information
36	DTM	C	2	5	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	52 Cumulative quantity end date
2380	Date/time/period	C an..35	C an..35	Brose: When plant is using SAP as ERP-system, all SCC+4 requirements until that date will be covered by the fabrication authorisation
				End date of cumulative quantity calculation
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+52:20040525:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	Material authorisation information
37	SCC	M	1	3	SCHEDULING CONDITIONS

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
SCC				
4017	Delivery plan status indicator, coded	M an..3	M an..3	3 Commitment for material
4493	Delivery requirements, coded	C an..3	N	Not used
C329	PATTERN DESCRIPTION	C	N	Not used
2013	Frequency, coded	C an..3	N	Not used
2015	Despatch pattern, coded	C an..3	N	Not used
2017	Despatch pattern timing, coded	C an..3	N	Not used

Remark:

Example:

SCC+3'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	Material authorisation information
	SG18	C	999	4	Material authorisation
38	QTY	M	1	4	QUANTITY

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
QTY				
C186	QUANTITY DETAILS	M	M	
6063	Quantity qualifier	M an..3	M an..3	3 Cumulative quantity
6060	Quantity	M n..15	M n..15	Brose: always quantity "0" when using SAP as ERP-system. The material authorisation is then described in the DTM-segment. Cumulative material authorisation quantity for the period defined in the following DTMs
6411	Measure unit qualifier	C an..3	C an..3	For code value see UN/ECE Recommendation No. 20

Remark:
Example:

QTY+3:0:PCE'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
	SG6	C	9999	1	GIS-SG7-SG12
	SG12	C	9999	2	LIN-PIA-LOC-FTX-SG13-SG15-SG17
	SG17	C	999	3	Material authorisation information
	SG18	C	999	4	Material authorisation
39	DTM	C	2	5	DATE/TIME/PERIOD

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
DTM				
C507	DATE/TIME/PERIOD	M	M	
2005	Date/time/period qualifier	M an..3	M an..3	52 Cumulative quantity end date
2380	Date/time/period	C an..35	C an..35	Brose: When plant is using SAP as ERP-system, all SCC+4 requirements between SCC+2 date and SCC+3 date will be covered by the material authorisation.
				End date of cumulative quantity calculation
2379	Date/time/period format qualifier	C an..3	C an..3	102 CCYYMMDD

Remark:
Example:

DTM+52:20040625:102 '

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
40	UNT	M	1	0	MESSAGE TRAILER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNT				
0074	Number of segments in a message	M n..6	M n..6	
0062	Message reference number	M an..14	M an..14	

Remark:**Example:**

UNT+39+1'

No = Consecutive segment number

MaxOcc = Maximum occurrence of the segment/group

St = Status, EDIFACT: M=Mandatory, C=Conditional

User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used

Segments

No	Tag	St	MaxOcc	Level	Name
41	UNZ	M	1	0	INTERCHANGE TRAILER

Standard			Implementation	
Tag	Name	St Format	St Format	Usage / Remark
UNZ				
0036	Interchange control count	M n..6	M n..6	
0020	Interchange control reference	M an..14	M an..14	

Remark:

Example:

UNZ+1+00207'

No = Consecutive segment number
MaxOcc = Maximum occurrence of the segment/group
St = Status, EDIFACT: M=Mandatory, C=Conditional
User specific: R=Required, O=Optional, D=Dependent, A=Advised, N=Not used